

View and Monitor Your Devices

The Device List is your central hub for monitoring all registered devices. The table automatically refreshes every 5 seconds to provide real-time status updates.

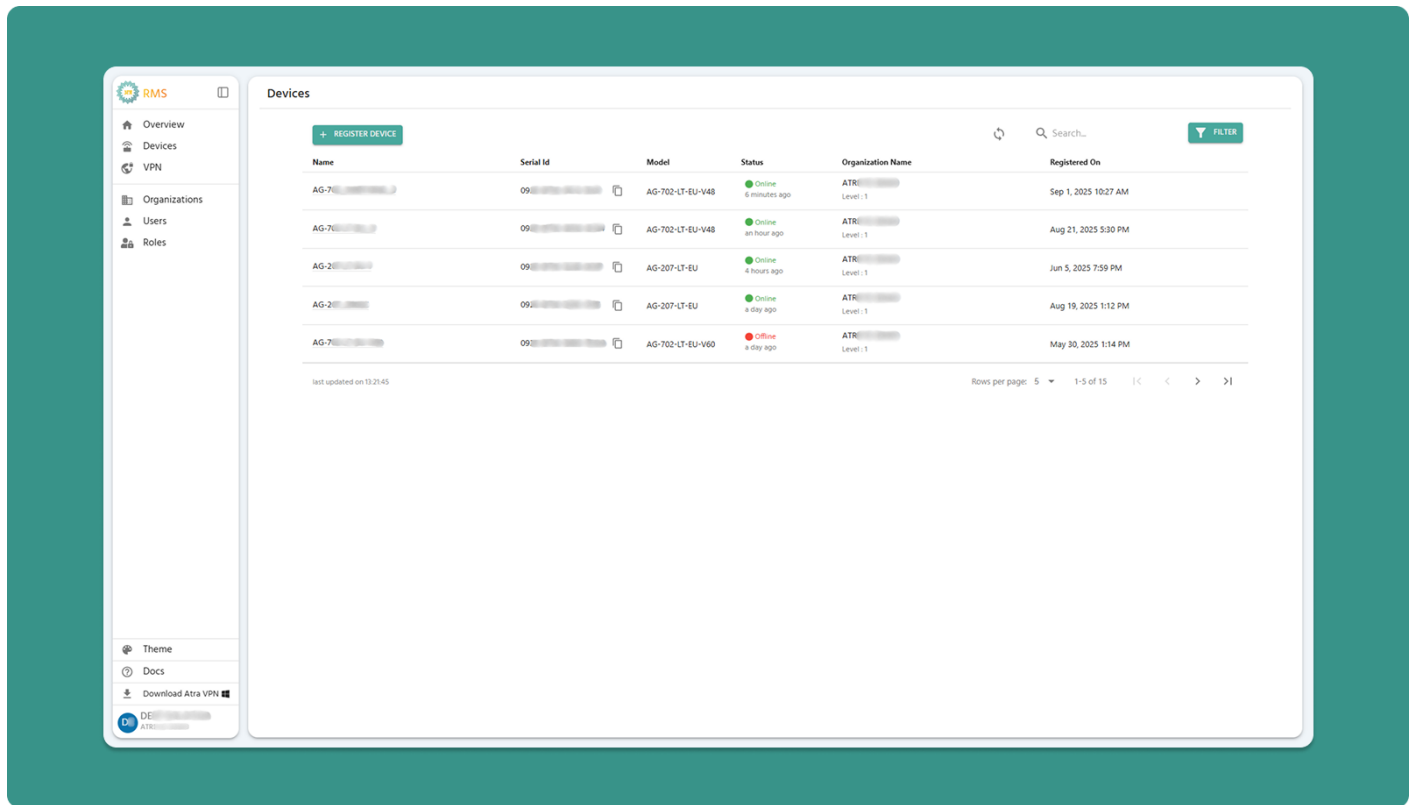



Table Actions (Top Bar)



Action	Button Location	Purpose
Register	Top-left (Teal)	Add new gateway to Atra RMS
Refresh	Top-right	Manually update table data
Search	Center bar	Filter by name, serial ID, or organization
Filter	Top-Right (Teal)	Filter data by model, organization, and status selection

Column Definitions

Column	Description	Key Information
Name	The custom name you assigned during registration.	Click to open Device Detail Page
Serial-ID	Unique 16-character device identifier (format: xxxx-xxxx-xxxx-xxxx)	Used for technical support and verification
Model	Atreyo hardware model designation	Identifies device capabilities and specifications
Status	Current connection state	Online (green) or Offline (red) with timestamp
Organization	Assigned organization with level	Shows hierarchy placement (e.g., "DEMO Level-2")
Registered On	Date and time device was added to Atra RMS	Helps track when a device was added

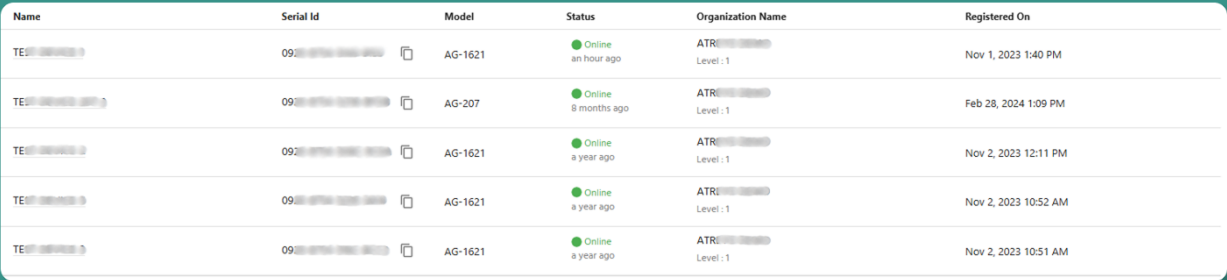

Name	Serial Id	Model	Status	Organization Name	Registered On
TE[REDACTED]	09[REDACTED]	AG-1621	Online an hour ago	ATR[REDACTED] Level : 1	Nov 1, 2023 1:40 PM
TE[REDACTED]	09[REDACTED]	AG-207	Online 8 months ago	ATR[REDACTED] Level : 1	Feb 28, 2024 1:09 PM
TE[REDACTED]	09[REDACTED]	AG-1621	Online a year ago	ATR[REDACTED] Level : 1	Nov 2, 2023 12:11 PM
TE[REDACTED]	09[REDACTED]	AG-1621	Online a year ago	ATR[REDACTED] Level : 1	Nov 2, 2023 10:52 AM
TE[REDACTED]	09[REDACTED]	AG-1621	Online a year ago	ATR[REDACTED] Level : 1	Nov 2, 2023 10:51 AM

Status Indicators Explained

Online Status:

- Indicator: Green Online text with green dot
- Timestamp: "5 minutes ago" (time since last communication)
- Meaning: Device is connected and transmitting data

Offline Status:

- Indicator: Red Offline text
- Timestamp: "2 hours ago" (time since last communication)
- Meaning: Device is not currently connected

Auto-Refresh Feature

Automatic Update: The table refreshes every 5 seconds without requiring manual action.

Benefits:

- Real-time status monitoring
- No need to repeatedly click refresh

Manual Override:

- Click the Refresh button (top-right) to force immediate update
- Useful when expecting immediate status change (e.g., after device power-on)

Navigation Features

A screenshot of a table navigation control bar. It features a dark teal background with a white rounded rectangle in the center. Inside the rectangle, the text "Rows per page: 5" is followed by a downward-pointing triangle icon. To the right of this is the text "1-3 of 3". Further right are four navigation icons: a vertical bar followed by a left-pointing chevron, a left-pointing chevron, a right-pointing chevron, and a right-pointing chevron followed by a vertical bar.

Table Controls (Bottom):

Control	Purpose	Options
Rows per page	Adjust visible devices	5, 10, 15, 20,25
Total Count	Displays total devices	"Showing 1-5 of 25"
Page Navigation	Move between pages	Previous, Next, Last, First

Quick Actions

Open Device Details:

1. Locate device in table
 2. Click the device Name (underlined text)
 3. Device Detail Page opens with full monitoring interface
-
-

Revision #4

Created 2025-12-13 09:11:31 UTC by Yogesh

Updated 2026-04-27 09:39:54 UTC by Deep